FIRST FENCE USA
WE LISTEN. WE CARE. WE DELIVER

Barbed Wire Brackets (Mesh Fencing)

Specification Sheet

SPC-MESH-TOP

Key Features

- Easy Installation
  (The sleeve design fits into a First Fence 2-3/8" post}
- Choice of Style
  (Select a straight, cranked, or Y-Shaped Bracket)
- Additional Security
  (Once added these brackets support razor or barbed wire)
- Perimeter Deterrence
  (Add height and additional toppers to your barrier)



Suitable For

- Warehouses
- Storage Facilities
- Airports
- Correctional Facilities
- Sensitive Government or Military Areas



Easy Installation

Each barbed wire bracket for mesh features a sleeve that fits directly into the open box section of a First Fence 2-3/8" post.



Choose your Style

Available as a straight style to give a vertical addition without changing the upright structure, cranked style that angles outwards making it difficult to scale, and Y-Shaped option which is useful for adding additional razor wire.



Innovative Lugged Fixings

The lugs are for attaching and tensioning barbed wire with ferrule winders.



Compatibility

These bracket extensions are compatible with 358, 868 and V Mesh posts (2-3/8").







Specification

Material	Pre-Galvanised Steel
Finish	Polyester Powder Coated
Colour	Green as standard
Style	Straight, Cranked or Y-Shaped
Compatibility	2-3/8" Mesh Posts



Available in Green 6005 as standard with other RAL colours available. Custom colours are available on request.

Call our Expert Sales Team for more information

www.firstfenceusa.com | sales@firstfenceusa.com | (945) 941-2111


FIRST FENCE USA
WE LISTEN. WE CARE. WE DELIVER

Barbed Wire Brackets (Mesh Fencing)

Straight Brackets

Corner Lugged

Length - 24"
Width - 2-3/8"
Depth -
Weight - 2.4kg
Lugs on two adjacent faces
Use for a change in fencing direction

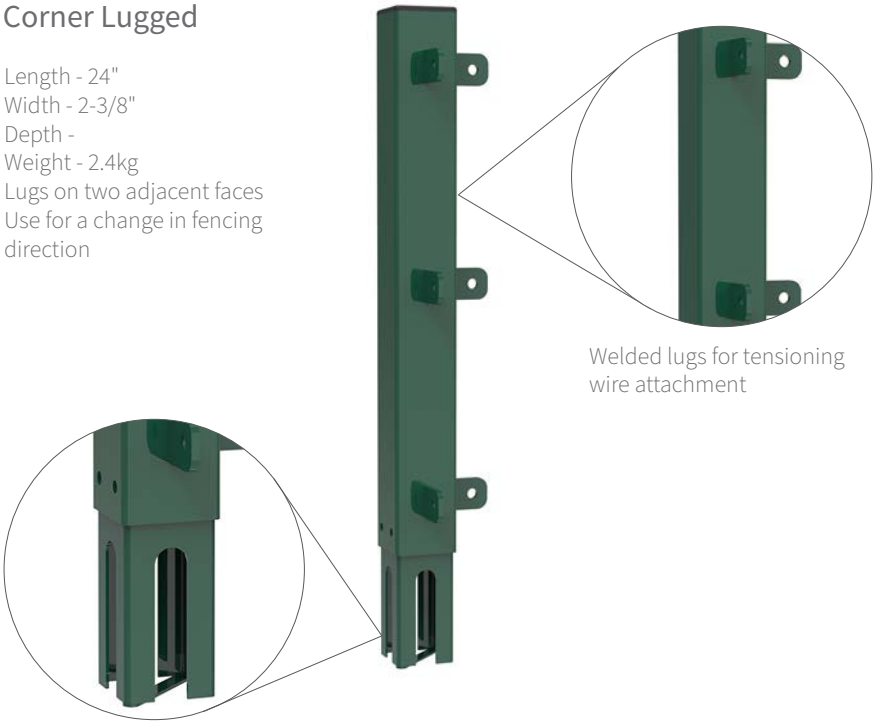


Welded lugs for tensioning wire attachment

Each post features a unique sleeve design that fits into the open box section of the fence post

End Lugged

Length - 24"
Width - 2-3/8"
Depth - 2-3/8"
Weight - 2.3kg
Lugs on one face
Use for forming a fencing run end

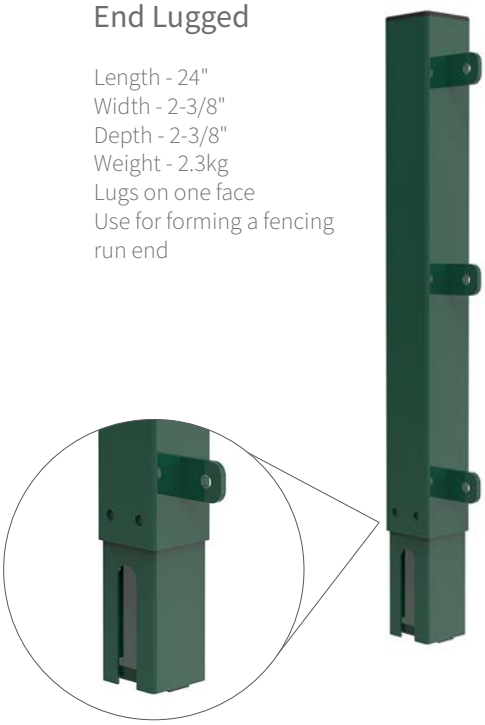

Each post comes with pre-drilled holes for fixing securely in place

Intermediate Holed

Length - 24"
Width - 2-3/8"
Depth - 2-3/8"
Weight - 2.3kg
Holes on two opposite faces
Use for intermediate posts



Intermediate Lugged

Length - 24"
Width - 2-3/8"
Depth - 2-3/8"
Weight - 2.5kg
Lugs on two opposite faces
Use for intermediate posts when stopping or starting a new section of barbed wire




Call our Expert Sales Team for more information

www.firstfenceusa.com | sales@firstfenceusa.com | (945) 941-2111

FIRST FENCE USA
WE LISTEN. WE CARE. WE DELIVER

Barbed Wire Brackets (Mesh Fencing)

Cranked Brackets

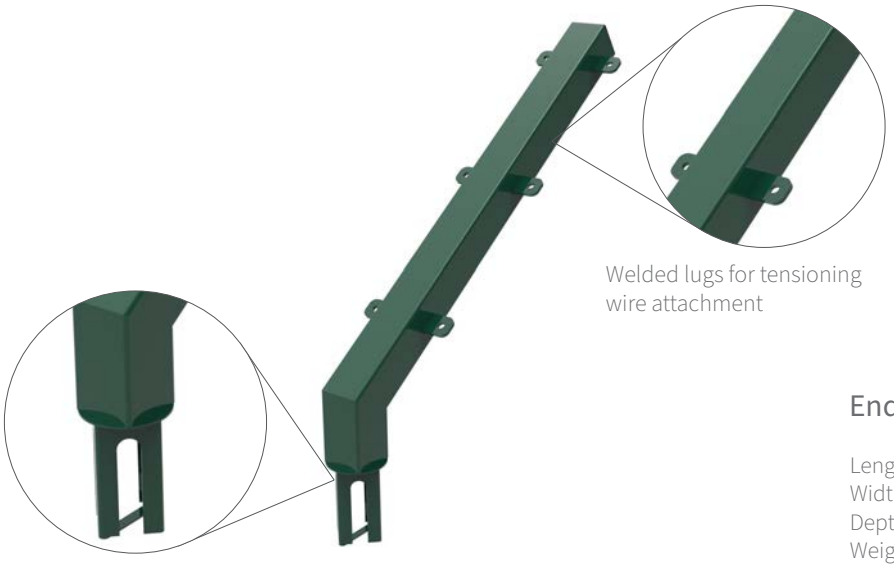

Welded lugs for tensioning wire attachment

Each post features a unique sleeve design that fits into the open box section of the fence post

Corner Lugged

Length - 27.5"
Width - 2-3/8"
Depth - 2-3/8"
Weight - 3.3kg
Lugs on two adjacent faces
Use for a change in fencing direction

End Lugged/End Lugged(inverted)

Length - 20”
Width - 2-3/8"
Depth - 2-3/8"
Weight - 2.8kg
Lugs on one face
Use the end lugged for the start of a run and the inverted for the end.



Each post comes with pre-drilled holes for fixing securely in place

End Lugged (inverted)

Upsell

Ferrule Winders Fixing Kit

Each kit contains x1 ferrule winder, x1 M8 x 25mm Security Bolt, and x1 M8 snap off nut. For use with all lugged brackets.



Intermediate Holed

Length - 20”
Width - 2-3/8"
Depth - 2-3/8"
Weight - 2.7kg
Holes on two opposite faces
Use for intermediate posts



Intermediate Lugged

Length - 21”
Width - 2-3/8"
Depth - 2-3/8"
Weight - 2.9kg
Lugs on two opposite faces
Use for intermediate posts when stopping or starting a new section of barbed wire



Call our Expert Sales Team for more information

www.firstfenceusa.com | sales@firstfenceusa.com | (945) 941-2111

FIRST FENCE USA
WE LISTEN. WE CARE. WE DELIVER

Barbed Wire Brackets (Mesh Fencing)

Y-Shaped Brackets

Corner Lugged

Length - 25”
Width - 2-3/8"
Depth - 2-3/8"
Weight - 5.5kg
Lugs on two adjacent faces
Use for a change in fencing direction



Welded lugs for tensioning wire

Each post features a unique sleeve design that fits into the open box section of the fence post

End Lugged

Length - 21”
Width - 2-3/8"
Depth - 2-3/8"
Weight - 4.4kg
Lugs on one face
Use for forming a fencing run end



Each post comes with pre-drilled holes for fixing securely in place

Intermediate Holed

Length - 21”
Width - 2-3/8"
Depth - 2-3/8"
Weight - 4.4kg
Holes on two opposite faces
Use for intermediate posts



Intermediate Lugged

Length - 21”
Width - 2-3/8"
Depth - 2-3/8"
Weight - 4.9kg
Lugs on two opposite faces
Use for intermediate posts when stopping or starting a new section of barbed wire




Call our Expert Sales Team for more information

www.firstfenceusa.com | sales@firstfenceusa.com | (945) 941-2111

FIRST FENCE USA

WE LISTEN. WE CARE. WE DELIVER

Straight Installation Diagram

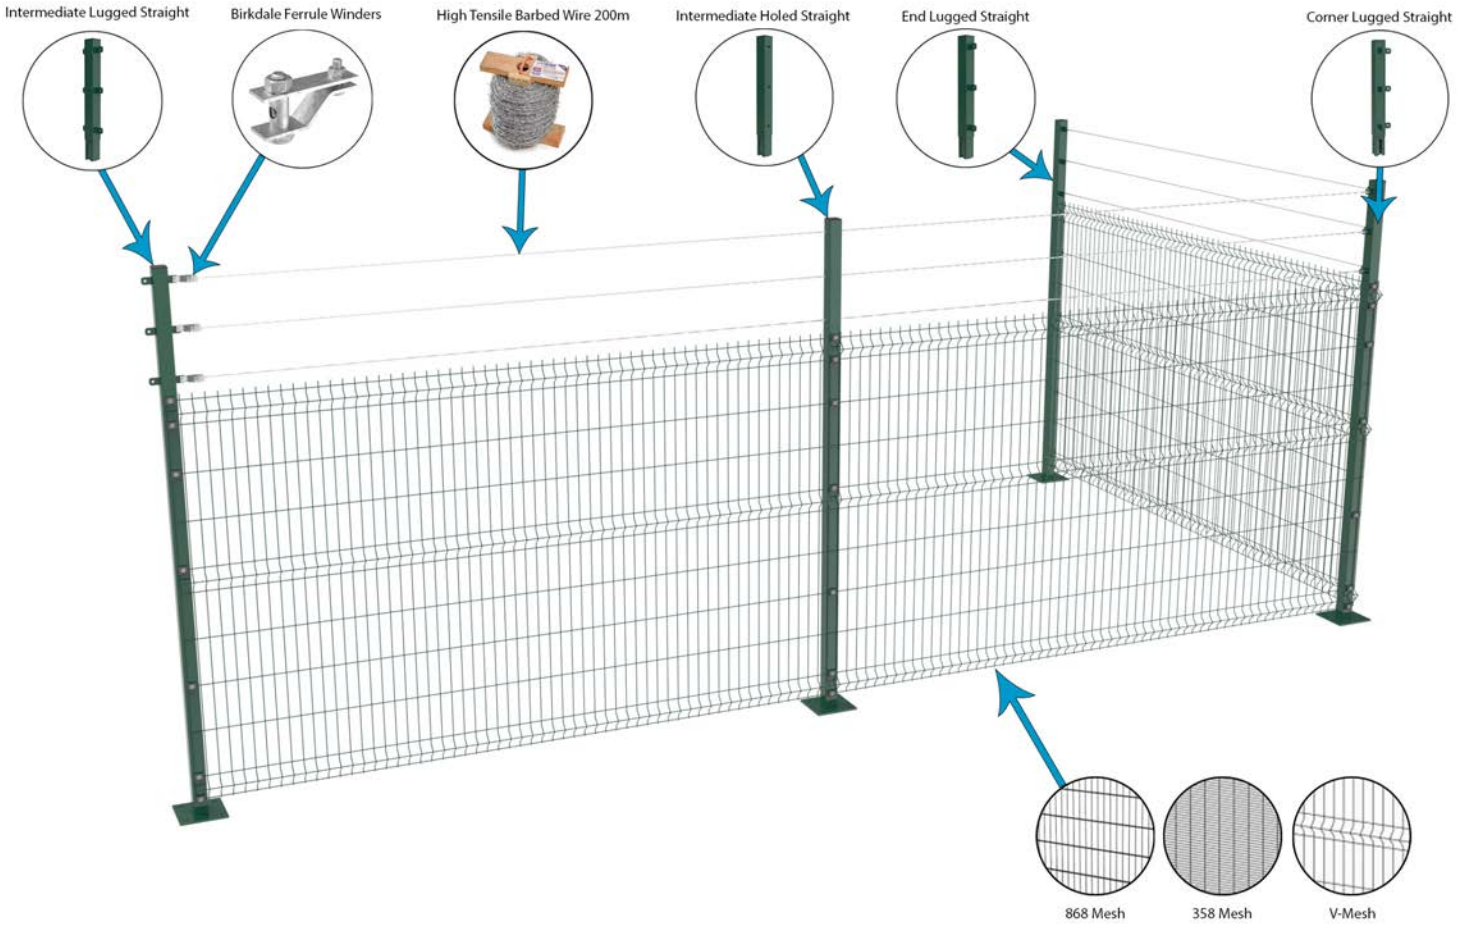


Call our Expert Sales Team for more information

www.firstfenceusa.com | sales@firstfenceusa.com | (945) 941-2111

FIRST FENCE USA

WE LISTEN. WE CARE. WE DELIVER

Cranked Installation Diagram

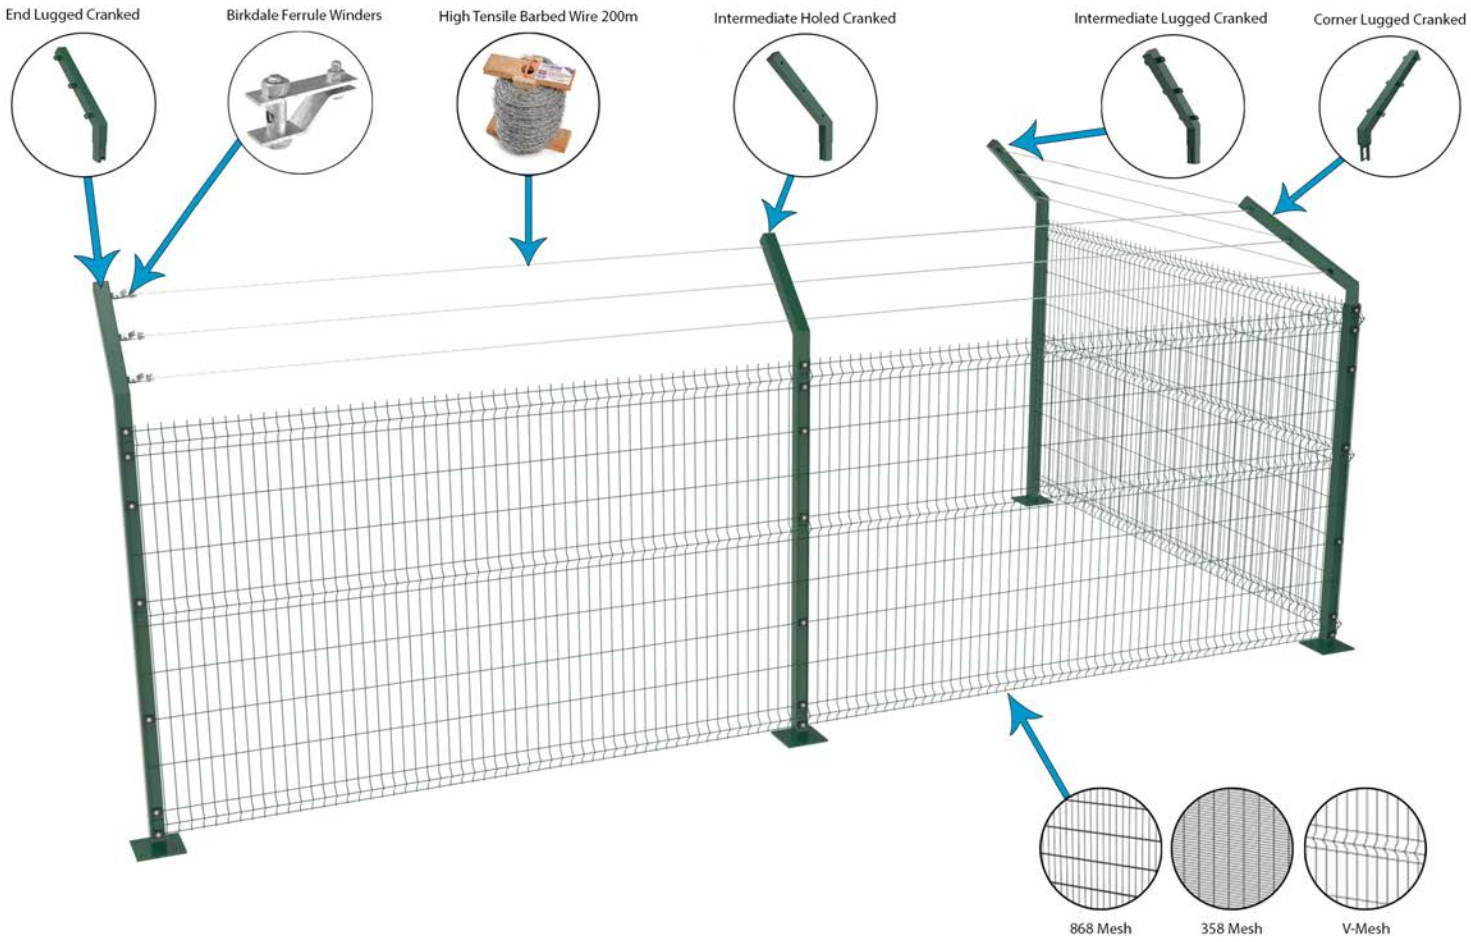


Call our Expert Sales Team for more information

www.firstfenceusa.com | sales@firstfenceusa.com | (945) 941-2111

FIRST FENCE USA

WE LISTEN. WE CARE. WE DELIVER

Y-Shaped Installation Diagram

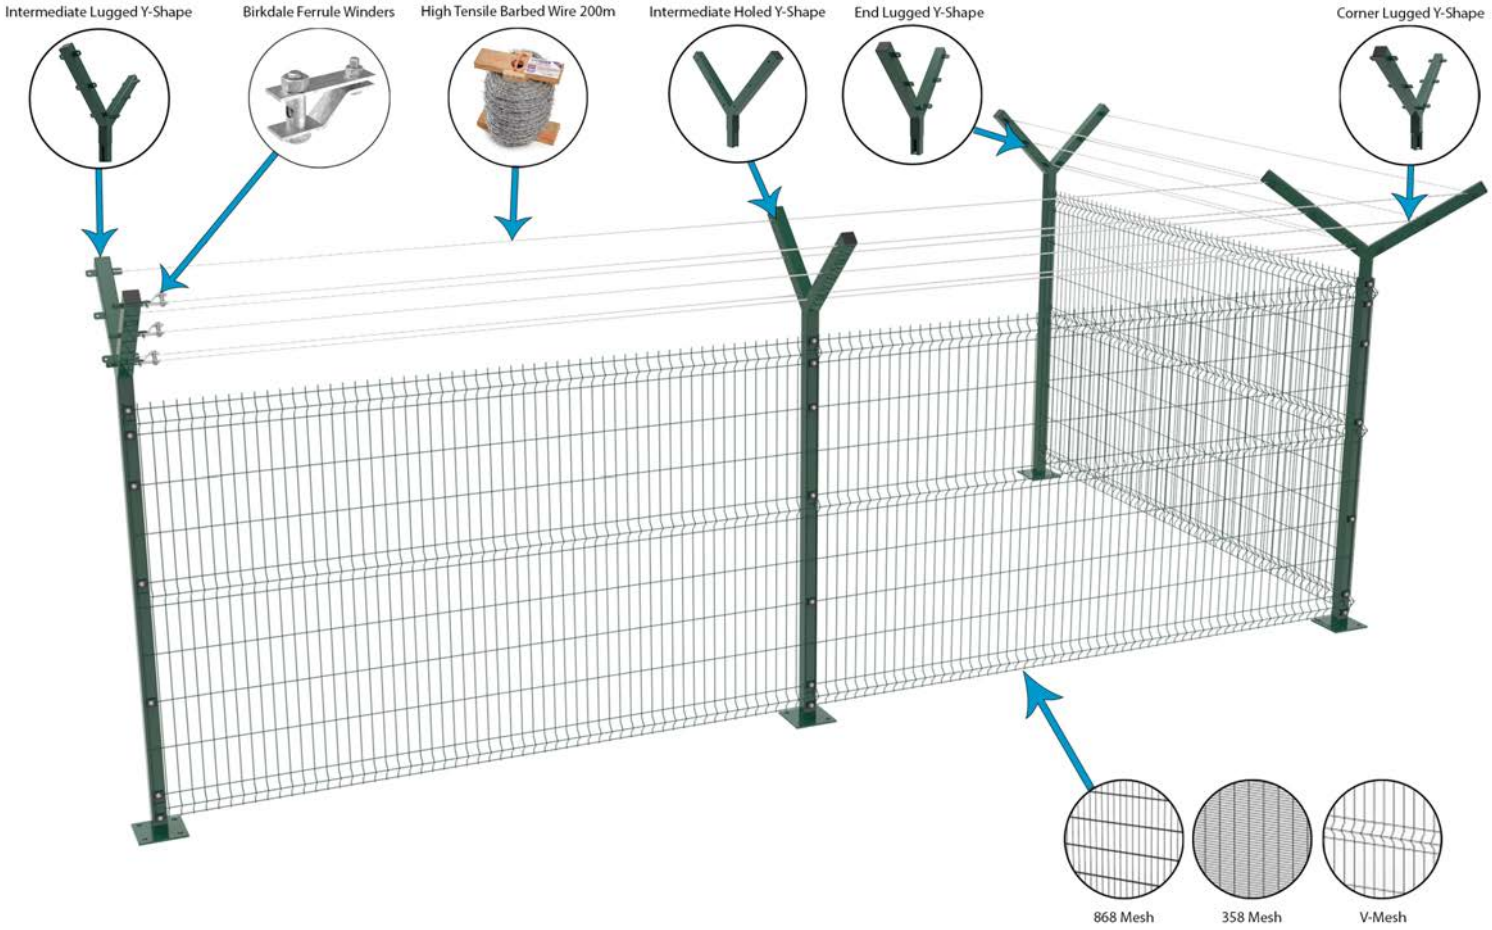

Call our Expert Sales Team for more information

www.firstfenceusa.com | sales@firstfenceusa.com | (945) 941-2111