



**FIRST FENCE USA**

WE LISTEN. WE CARE. WE DELIVER

# PAL

## VPS - VIDEO PANEL SYSTEM



Up to 6000 users



Touch Screen  
Panel Interface



Cellular Connectivity



Ethernet Connectivity




Cloud based - easy  
to use software




Anti Vandal Design



Anti Vandal Glass



Ambient Light  
Sensor



Wiegand-26

429 W Kennedale Pkwy, Kennedale, TX 76060

Call our Expert Sales Team for more information

[www.firstfenceusa.com](http://www.firstfenceusa.com) | [sales@firstfenceusa.com](mailto:sales@firstfenceusa.com) | (945) 941-2111

## Features

- VPS is a video telephone entry system, showing a live video feed during calls
- Group Calling
- Built-in multi-protocol reader
- Available Wiegand input for aux. devices, i.e. cards, transmitters, UHF reader, etc.
- Simple, intuitive user portal
- Very low annual renewal cost regardless of # of users
- Custom powder-coated mounting options - hood, post mount adapter, and cabinet pedestal available


## Mounting Options

---

Wall Mount



Post Mount

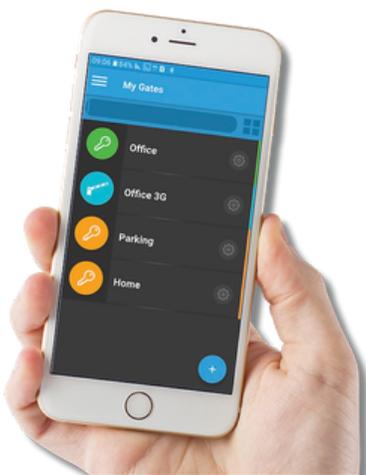

## CLOUD-BASED SOFTWARE

The PAL VPS is operated through an intuitive cloud-based software that gives flexibility to use it from a desktop or through the dedicated PAL application.

You are able to manage multiple access points with a PAL device from a single dashboard, view unlimited event logs, and manage user access. This unparalleled management made easy gives you more power to manage access control.



## Specifications

<b>Display Size</b>	7-inch
<b>Display Resolution</b>	720x1280
<b>Camera</b>	8M pixels - View Angle 120°
<b>Cellular network supported</b>	4G / 3G / 2G
<b>Bluetooth</b>	BT4.2 LE
<b>NFC</b>	13.56 MHz
<b>Ethernet</b>	RJ45, 10/100Mbps
<b>Relay</b>	2 * Relays (N.O/N.C)
<b>Input</b>	2 * Input
<b>Supports App</b>	Android / iOS
<b>PoE</b>	Fully-Integrated IEEE 802.3-Compliant POE+ PD Interface
<b>Card reader</b>	NFCIP-1, NFCIP-2, ISO/IEC 14443, ISO/IEC 15693, MIFARE
<b>Audio Interfaces</b>	Speaker: Hidden powerful 15W/4Ω Microphone: -42dB ±3dB @ 94dB SPL
<b>Installation</b>	Wall-mounted Flush-mounthed
<b>Power Supply</b>	DC 48V or/and PoE+
<b>Power Output</b>	DC 12V 2.5A
<b>Working Temperature</b>	-20 to 65°C
<b>Physical Characteristics Size</b>	Size: 251.6 x 129.6 mm
<b>Languages</b>	English,Hebrew,Russian,Spanish,Dutch