

**SUREClose®****READYFit**

Horizontally adjustable GateStop for large gates

This GateStop is mandatory for READYFIT "SF" model hinges.
However, it is designed to work with all READYFIT hinge models

Custom finish rated to
1,000 hours of salt spray
- no need to grind off
before welding

Weld or fasten -
12g Tek screws
included

Quick-fit alignment leg for
ease of installation,
alignment and double face-
fixing strength

9g (4mm) steel
bracket stands up to
heavy abuse

Horizontally adjustable
bumper to ensure
maximum opening of 85°
for gate gaps of 12-35mm


Weld or fasten -
12g Tek screws
included

Rubber bumper
minimises bounce-back
and reduces slam noise

LIMITED
**2 YEAR
WARRANTY**



Adjustable, to stop gate at 85°

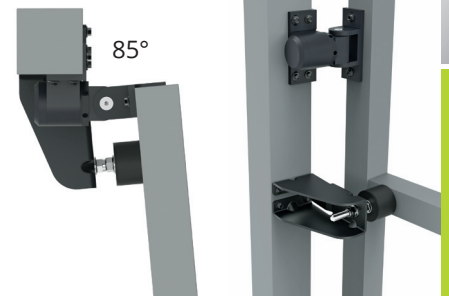

Reversible, for right- or left-handed mounting

SureClose® READYFIT Gate Stop

- Gate stops at 85° to prevent damage to hinge-closers
- Reduces wear on gate and lessens need to adjust hinges
- Semi-soft rubber bumper minimises gate bounce-back
- Weld or fasten - 12g Tek screws included
- Custom finish rated to 1,000 hours of salt-spray and 500 hours UV - no need to grind off before welding
- Stainless steel components
- Horizontally adjustable to ensure maximum opening of 85° for hinge-side gate gaps of 12-35mm



D&D Technologies

World's most trusted gate hardware


SureClose SF models require a separate gate-stop to be installed to prevent the gate from being forced past 90°, however the recommended maximum opening is 85° to take into consideration possible installation abnormalities.

Absence of a gate-stop will void warranty of your SureClose[®] READYFIT SF-model hinge-closers.

D&D recommends installing the GateStop at the bottom of the fence post so that it aligns with the bottom rail of the gate.

Tighten firmly all hinge pivot screws on both hinges with a suitable Allen Key (to a minimum of 10N.m)

!
The 7403 RF GateStop is designed to work with all READYFIT hinges and FLUSH MOUNT "SF" model hinges.



Product Dimensions

CODE	MODEL	TYPE	BRACKET	GAP VARIANCE	FENCE POST SIZE MINIMUM
7403	RF GateStop	READYFIT GateStop	Steel weld or fasten	12-35mm	76mm

INSTALL GATESTOP WITH THESE READYFIT MODEL HINGE-CLOSERS

MANDATORY		OPTIONAL	
74108323	RF 108SF S	74001313	RF SM S
74108325	RF 108SF W	74001315	RF SM W
		74108313	RF 108 S
		74108315	RF 108 W

SureClose READYFIT GateStop

CAUTION: For use on READYFIT SF, SM and 108 hinges and hinge-closers.

The SureClose[®] READYFIT GateStop mounts to the hinge post and is to make contact with any horizontal rail, not the vertical gate frame.




The gap variance for both the hinge and GateStop is 13-35mm, with a factory setting of 13mm. When a larger gap is needed, the hinge and GateStop must be adjusted equally to maintain the maximum 85° open position.

Allowing the gate to swing past 90° (85° to be safe) will damage the internal components of the hinge and void the warranty of the hinges.

WELDING

Painting is optional on the GateStop if you are using the included fasteners. If welding, you do not need to first grind off the finish. The READYFIT GateStop comes with a proprietary finish that allows a direct weld without adding impurities, thus resulting in a clean weld.

Apply an appropriate finish after welding to protect the surfaces.

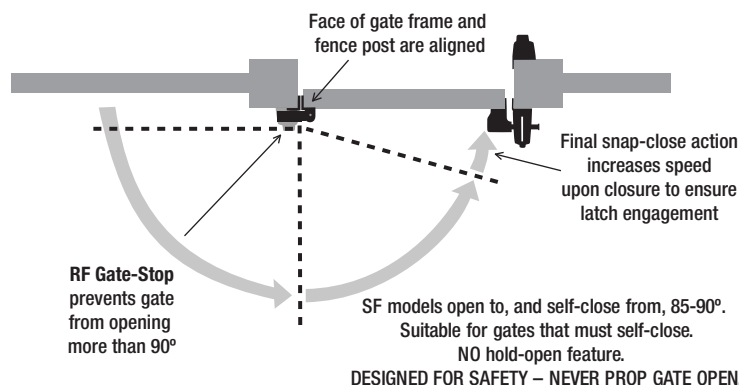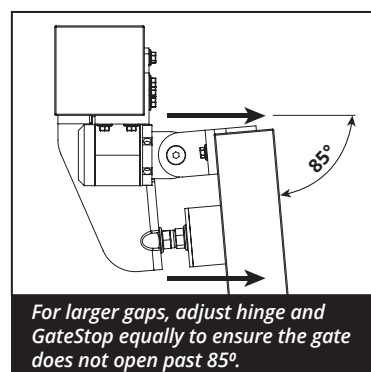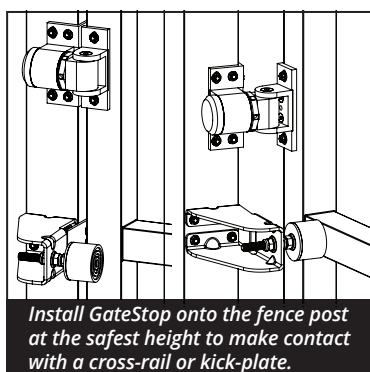

www.ddtechglobal.com

Unit 6, 4-6 Aquatic Drive, Frenchs Forest NSW 2086
Tel: (02) 9454 7888 Email: sales@ddtech.com.au